



21600 NORDHOFF ST.  
CHATSWORTH, CALIFORNIA 91311 USA  
PH: (818) 882-1238 FAX: (818) 882-7144  
E-Mail: sor@sor.com  
Internet: <http://www.sor.com>

---

## #258-112 SINGLE MOUNT AX OR SHOVEL HOLDER FITS 4" & 6" TALL ROOF RACK SIDES

### **Parts List**

Qty 2 - Bottom Support Brackets  
Qty 2 - Top Brackets  
Qty 2 - Top Clamps  
Qty 4 - 3/8 x 3-1/2 All Tread Tap Bolts  
Qty 4 - 3/8 Lockwashers  
Qty 4 - 3/8 Nuts  
Qty 12 - 3/8 USS Flatwashers  
Qty 4 - 3/8 Wingnuts  
Qty 2 - 4" High Side Spacers  
Qty 4 - .360 x 3/8 Black Thread Protectors



### **INSTALLATION INSTRUCTIONS**

**NOTE!!!** System was designed to hold one ax or shovel. The brackets are adjustable to accept most any size shovel or ax.

1. The mounting system will mount to any height Wilderness Roof Rack. See figures 1,2, 3 & 5 for your specific mounting system.
2. When mounting a shovel, the blade must wrap around the corner of the rack for clearance, see figure 4.
3. Install bottom support plate and top bracket to roof rack side. Spread tap bolts to their widest position and tighten as shown in figure 5.
4. Position second bracket about 11" or 12" apart and secure to roof rack side.
5. Install ax or shovel to top bracket and secure with the top clamp and wingnuts, as shown in figure 5.
6. Some adjustment will be required to fit your specific ax or shovel.
7. Recheck tightness of wingnuts on a regular basis or after increased vehicle usage.

Manufactured exclusively for Specter Off-Road By Garvin Industries

## UNIVERSAL AX OR SHOVEL ROOF RACK BRACKET

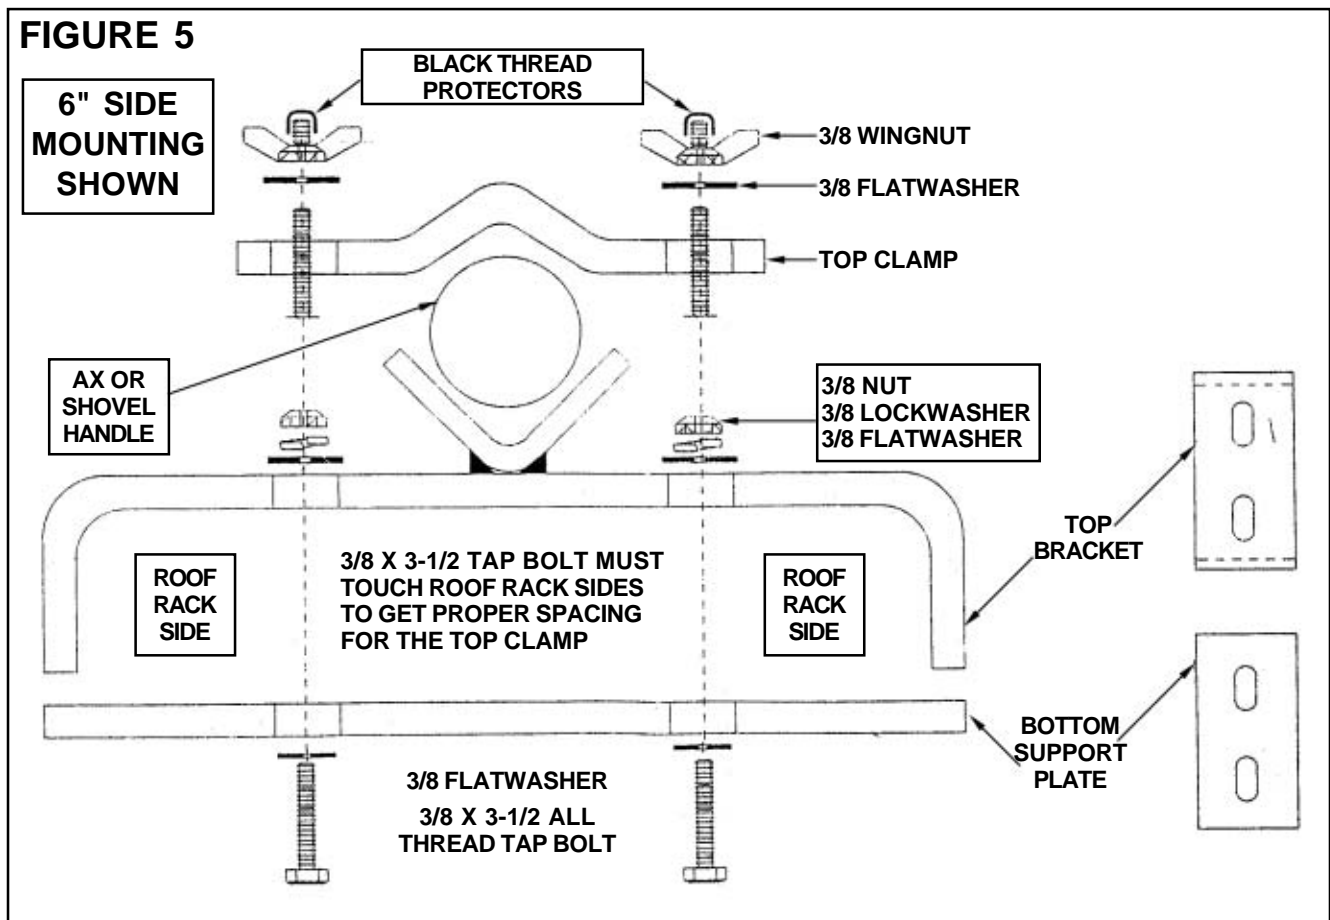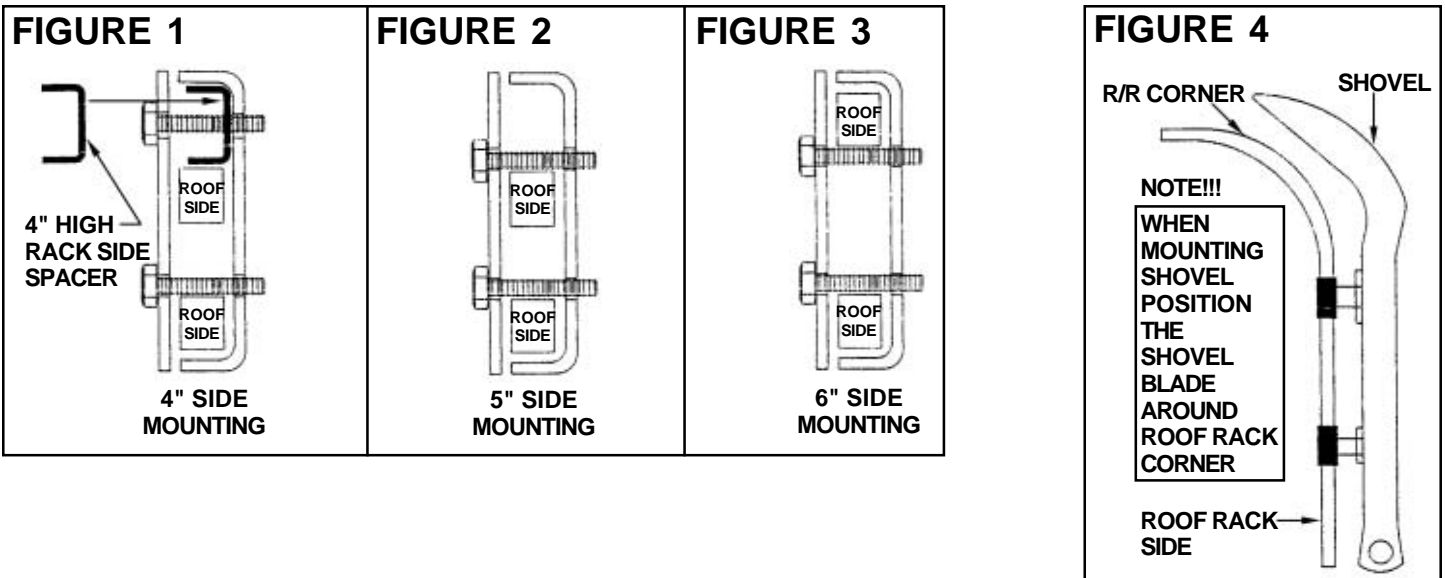

Manufactured exclusively for Specter Off-Road By Garvin Industries